



#### ROLAIR STANDARD FEATURES

- PUMP:** Two-Stage, Cast-Iron Cylinders, Aluminum Head and Crankcase for Faster Heat Dissipation, Ball Bearings, Splash-Lubricated, Bearing Inserts on Connecting Rods, High-Efficiency Reed Valves, Oil Sight Gauge, Low RPM's to Ensure Long Life and Trouble-Free Performance. **For Pump Specifications See Reverse Side**
- TANK :** Horizontal - 60, 80 or 120 Gallon - ASME  
Vertical - 120 Gallon Only  
(Base-Mount Units Also Available)
- MOTOR:** Open Drip-Proof  
230 Volt – 60 Hz - 1800 RPM – 1 Phase  
230/460 Volt–60 Hz - 1800 RPM – 3 Phase
- APPROXIMATE SHIPPING WEIGHT:**  
665 lb. - 60 Gallon Models  
725 lb. - 80 Gallon Models  
895 lb. - 120 Gallon Models


#### STANDARD EQUIPMENT

- Pressure Switch - Start/Stop Operation 145-175 PSI Settings, On/Off Switch
- Automatic Unloading Device for Loadless Starts
- Heavy-Duty Brass Shut-Off Valve
- Pressure Gauge - 0-300 PSI in 5 lb. Graduations
- Safety Relief Valve - ASME Approved
- V-Belt Drive
- Intake Filter/Silencer with Replaceable Element
- Totally Enclosed Steel Belt Guard

#### OPTIONAL EQUIPMENT

Magnetic Starter, Automatic Tank Drain, Low-Oil Shutdown, Level-Rite Mounts, Vibration Pads, 208V Motor, Dual Controls, Head Unloader, Air-Cooled Aftercooler, Refrigerant Air Dryer

# MODEL PMP24K60CH

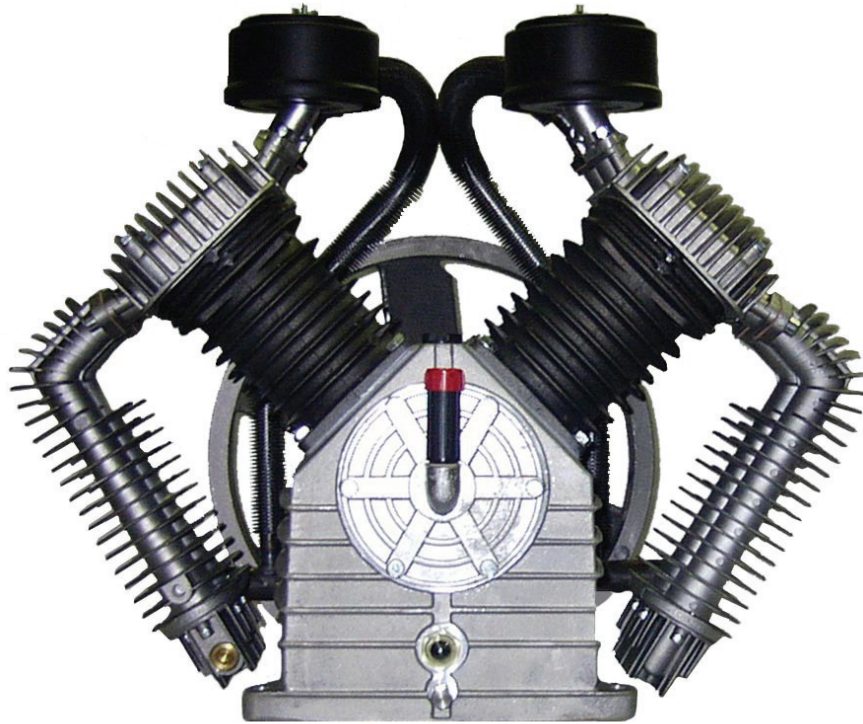

K60

## SPECIFICATIONS

NO. OF CYLINDERS	CYLINDERS BORE & STROKE (inches)	OIL CAPACITY (oz.)	FWHL DIAMETER (inches)	DRY WEIGHT (lb.)	MAXIMUM PRESSURE
4	4.13(2) & 2.05(2) x 3.31	98	*(H) 21.65 *(V) 17.72	182	200 PSI

\*H=Horizontal Tank Units \*V=Vertical Tank Units

## PERFORMANCE

HP	DISCHARGE PRESSURE	CFM DISPLACED @ 175 PSI	CFM DELIVERED @ 175 PSI	PUMP RPM
10	175 PSI	41.1	33.7	800